

Rolls

DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

12 EHG 210P



Series	4000	Warranty	7 Years
Volts	12	BCI	4DH
Cells	4	Plates/Cell	17
Terminal Type	Universal		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Float Voltage Range	13.5 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	778
Marine Crank Amps (MCA) 32°F / 0°C	972
Reserve Capacity (RC @ 25A)	504 Minutes
Reserve Capacity (RC @ 75A)	168 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	279 AH	2.79 A
@ 75 Hour Rate	265 AH	3.68 A
@ 50 Hour Rate	250 AH	5 A
@ 20 Hour Rate	210 AH	10.5 A
@ 15 Hour Rate	200 AH	13.3 A
@ 10 Hour Rate	185 AH	18.48 A
@ 8 Hour Rate	181 AH	22.58 A
@ 5 Hour Rate	166 AH	33.18 A
@ 1 Hour Rate	84 AH	84 A

Amphère hour capacity ratings based on specific gravity of 1.280.
Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	62.5 kg	138 lbs
Length	52.7 cm	20.75"
Width	22.2 cm	8.75"
Height Inc. Term.	31.4 cm	12.38"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Molded	

Cycle Life vs. Depth of Discharge

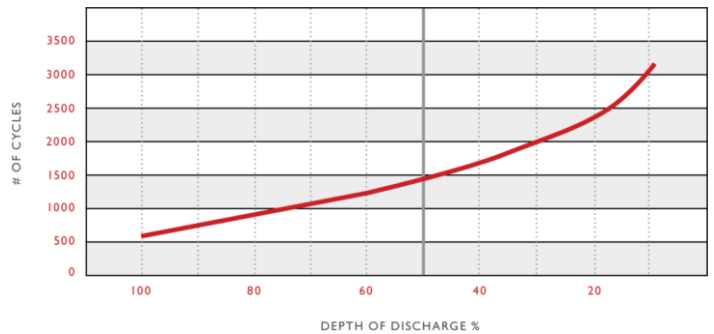

Voltage vs. Depth of Discharge

