



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

12 FS 130



Series	FS	Warranty	1 Year
Volts	12	BCI	Grp 31
Cells	6	Plates/Cell	11
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge

Charge Voltage Range	14.7-15 V/cell @ 25°C (77°F)
Float Voltage Range	13.5 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	620
Marine Crank Amps (MCA) 32°F / 0°C	775
Reserve Capacity (RC @ 25A)	216 Minutes
Reserve Capacity (RC @ 75A)	64 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	173 AH	1.73 A
@ 20 Hour Rate	130 AH	6.5 A
@ 5 Hour Rate	99 AH	16 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL

ISO 9001
Quality

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	29.5kg	65lbs
Length	33cm	13"
Width	17.1cm	6.75"
Height Inc. Term.	24.1cm	9.5"
Electrolyte Reserve	38 mm	1.5"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Mount Plastic	

Cycle Life vs. Depth of Discharge

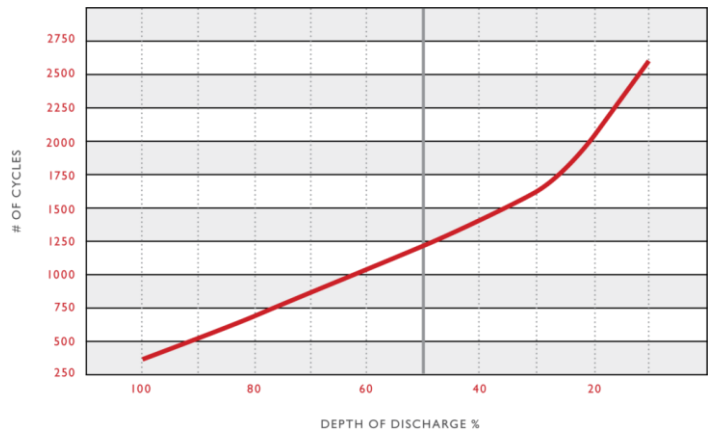

Voltage vs. Depth of Discharge

