

Rolls

DISTRIBUIDO POR

KONNEKTO
ENERGY

+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

16CH33P



Series	5000	Warranty	5 Years
Volts	32	BCI	SPEC
Cells	16	Plates/Cell	33
Terminal Type	Paddle RR		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	2754
Marine Crank Amps (MCA) 32°F / 0°C	3443
Reserve Capacity (RC @ 25A)	2114 Minutes
Reserve Capacity (RC @ 75A)	705 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	1242 AH	12.42 A
@ 75 Hour Rate	914 AH	12.69 A
@ 50 Hour Rate	845 AH	16.9 A
@ 20 Hour Rate	881 AH	44.05 A
@ 15 Hour Rate	819 AH	54.62 A
@ 10 Hour Rate	731 AH	73.12 A
@ 8 Hour Rate	687 AH	85.9 A
@ 5 Hour Rate	590 AH	118.05 A
@ 1 Hour Rate	300 AH	299.54 A

Amper hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	729.5kg	1608lbs
Length	109.2cm	43"
Width	68.6cm	27"
Height Inc. Term.	50.8cm	20"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene - heatsealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snapfit to outer container	
Handles	None	

Cycle Life vs. Depth of Discharge

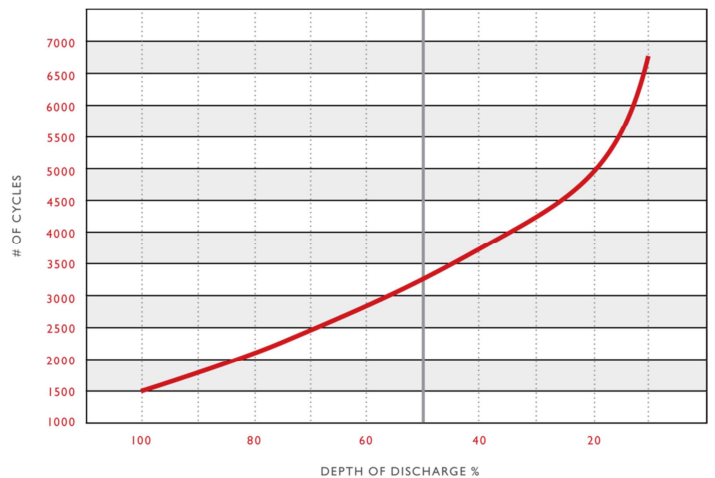

Voltage vs. Depth of Discharge

