



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

**FLOODED DEEP CYCLE BATTERY**

**31 M 130**



Series	4000	Warranty	7 Years
Volts	12	BCI	Grp 31
Cells	6	Plates/Cell	11
Terminal Type	DT		
Included Hardware S/S Hex Cap Screw, Nut, Lock & Flat Washer			
Size & Thread	5/16"-18 x 1-1/2"		

**Charge**

Charge Voltage Range	14.7-15V/cell @ 25°C (77°F)
Float Voltage Range	13.5V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	15A
Maximum Charge Current (String)	25 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

**Capacity**

Cold Crank Amps (CCA) 0°F / -17°C	620
Marine Crank Amps (MCA) 32°F / 0°C	775
Reserve Capacity (RC @ 25A)	216 Minutes
Reserve Capacity (RC @ 75A)	64 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>173 AH</b>	<b>1.73 A</b>
@ 20 Hour Rate	<b>130 AH</b>	<b>6.5 A</b>
@ 5 Hour Rate	<b>80 AH</b>	<b>16 A</b>

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

**Specifications**




SAI GLOBAL  
ISO 9001  
Quality

Weight	29.5kg	65lbs
Length	33cm	13"
Width	17.1 cm	6.75"
Height Inc. Term.	24.1 cm	9.5"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	38 mm	1.5"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Integrated Top Mount	

**Cycle Life vs. Depth of Discharge**

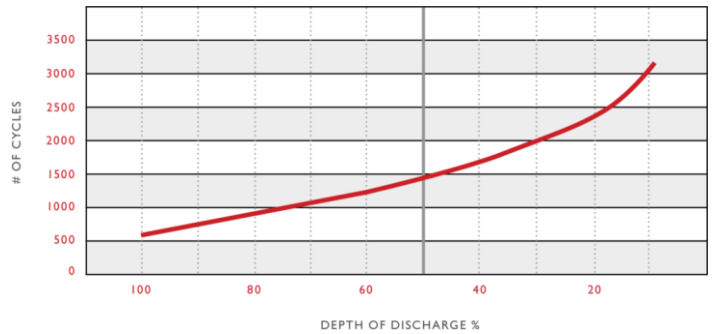

**Voltage vs. Depth of Discharge**

