



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

4 CH 23P



Series	5000	Warranty	5 Years
Volts	4	BCI	SPEC
Cells	2	Plates/Cell	23
Terminal Type	Flag RR		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		
Cables	19" 4/0 interconnect cables *RE incl.		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	1893
Marine Crank Amps (MCA) 32°F / 0°C	2367
Reserve Capacity (RC @ 25A)	1452 Minutes
Reserve Capacity (RC @ 75A)	484 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	853 AH	8.53 A
@ 75 Hour Rate	628 AH	8.72 A
@ 50 Hour Rate	580 AH	11.61 A
@ 20 Hour Rate	605 AH	30.25 A
@ 15 Hour Rate	563 AH	37.51 A
@ 10 Hour Rate	502 AH	50.22 A
@ 8 Hour Rate	472 AH	58.99 A
@ 5 Hour Rate	405 AH	81.07 A
@ 1 Hour Rate	206 AH	205.7 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	58kg	128 lbs
Length	36.5 cm	14.38"
Width	21 cm	8.25"
Height Inc. Term.	46.4 cm	18.25"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	95 mm	3.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene- heatsealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snapfit to outer container	
Handles	Rope / Plastic Handle	

Cycle Life vs. Depth of Discharge

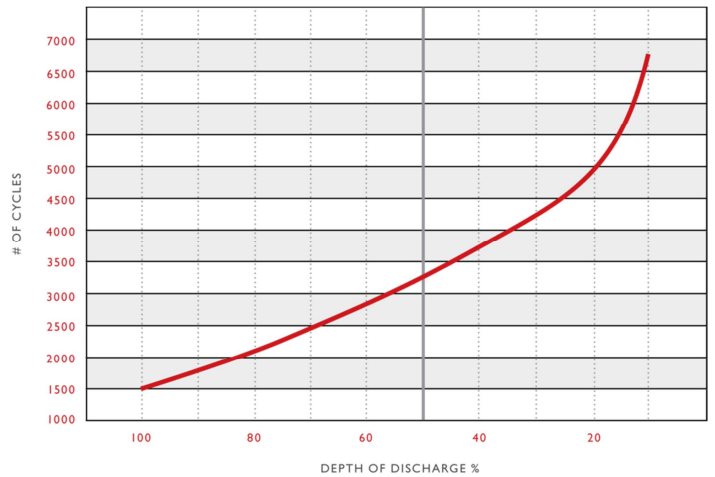

Voltage vs. Depth of Discharge

