

Rolls

DISTRIBUIDO POR

KONNEKTO
ENERGY

+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

4 CS 17P



| | | | |
|-------------------|--|-------------|----------|
| Series | 5000 | Warranty | 10 Years |
| Volts | 4 | BCI | SPEC |
| Cells | 2 | Plates/Cell | 17 |
| Terminal Type | Flag RR | | |
| Included Hardware | S/S Hex Cap Screw, Nut, Lock & Flat Washer | | |
| Size & Thread | 5/16"-18 x 1-1/2" | | |
| Cables | 19" 4/0 interconnect cables *RE incl. | | |

Charge

| | |
|----------------------|---------------------------------|
| Charge Voltage Range | 2.45-2.5 V/cell @ 25°C (77°F) |
| Float Voltage Range | 2.25-2.3 V/cell @ 25°C (77°F) |
| Self-Discharge Rate | 5%-10% per month at 25°C (77°F) |

Capacity

| | |
|------------------------------------|--------------|
| Cold Crank Amps (CCA) 0°F / -17°C | 1393 |
| Marine Crank Amps (MCA) 32°F / 0°C | 1742 |
| Reserve Capacity (RC @ 25A) | 1310 Minutes |
| Reserve Capacity (RC @ 75A) | 437 Minutes |

| Hour Rate | Capacity / AMP Hour | Current / AMPs |
|-----------------|---------------------|----------------|
| @ 100 Hour Rate | 770 AH | 7.7 A |
| @ 75 Hour Rate | 566 AH | 7.87 A |
| @ 50 Hour Rate | 524 AH | 10.48 A |
| @ 20 Hour Rate | 546 AH | 27.3 A |
| @ 15 Hour Rate | 508 AH | 33.85 A |
| @ 10 Hour Rate | 453 AH | 45.32 A |
| @ 8 Hour Rate | 426 AH | 53.24 A |
| @ 5 Hour Rate | 366 AH | 73.16 A |
| @ 1 Hour Rate | 186 AH | 185.64 A |

Amper hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

| | | |
|-------------------|---------|---------|
| Weight | 58kg | 128 lbs |
| Length | 36.5 cm | 14.38" |
| Width | 21 cm | 8.25" |
| Height Inc. Term. | 46.4 cm | 18.25" |

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

| | | |
|---------------------|--|-------|
| Electrolyte Reserve | 95 mm | 3.75" |
| Container (Inner) | Polypropylene | |
| Cover (Inner) | Polypropylene- heatsealed to inner container | |
| Container (Outer) | High Density Polyethylene | |
| Cover (Outer) | High Density Polyethylene snapfit to outer container | |
| Handles | Rope / Plastic Handle | |

Cycle Life vs. Depth of Discharge

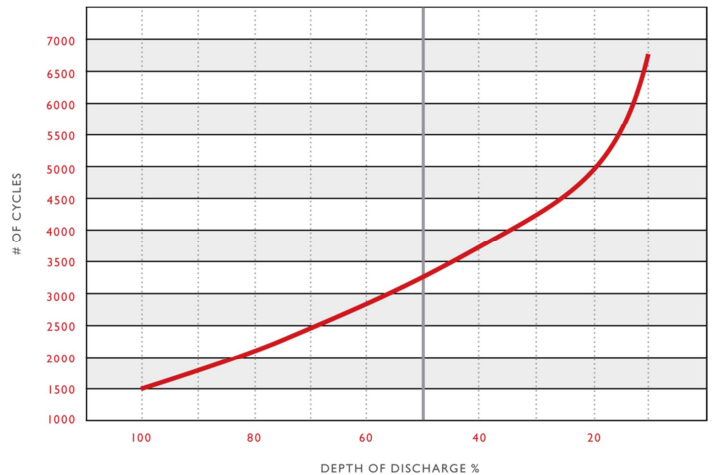

Voltage vs. Depth of Discharge

