



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

6 FS215



Series	FS	Warranty	1 Year
Volts	6	BCI	GC2
Cells	3	Plates/Cell	15
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge	
Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity	
Cold Crank Amps (CCA) 0°F / -17°C	547
Marine Crank Amps (MCA) 32°F / 0°C	684
Reserve Capacity (RC @ 25A)	434 Minutes
Reserve Capacity (RC @ 75A)	112 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	275 AH	2.75 A
@ 75 Hour Rate	271 AH	3.76 A
@ 50 Hour Rate	256 AH	5.12 A
@ 20 Hour Rate	215 AH	10.75 A
@ 15 Hour Rate	204 AH	13.62 A
@ 10 Hour Rate	189 AH	18.92 A
@ 8 Hour Rate	185 AH	23.11 A
@ 5 Hour Rate	170 AH	33.97 A
@ 1 Hour Rate	86 AH	86 A

Amper hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	27kg	59.5 lbs
Length	25.9 cm	10.19"
Width	18.1 cm	7.13"
Height Inc. Term.	27.9 cm	11"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	

Cycle Life vs. Depth of Discharge

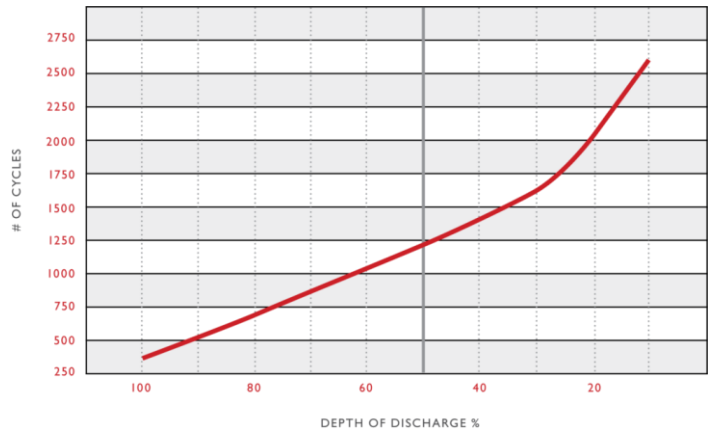

Voltage vs. Depth of Discharge

