



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

## FLOODED DEEP CYCLE BATTERY

## 6 FS350



Series	FS	Warranty	1 Year
Volts	6	BCI	L16
Cells	3	Plates/Cell	15
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	847
Marine Crank Amps (MCA) 32°F / 0°C	1058
Reserve Capacity (RC @ 25A)	840 Minutes
Reserve Capacity (RC @ 75A)	206 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>466 AH</b>	<b>4.66 A</b>
@ 75 Hour Rate	<b>441 AH</b>	<b>6.13 A</b>
@ 50 Hour Rate	<b>417 AH</b>	<b>8.33 A</b>
@ 20 Hour Rate	<b>350 AH</b>	<b>17.5 A</b>
@ 15 Hour Rate	<b>333 AH</b>	<b>22.17 A</b>
@ 10 Hour Rate	<b>308 AH</b>	<b>30.8 A</b>
@ 8 Hour Rate	<b>301 AH</b>	<b>37.63 A</b>
@ 5 Hour Rate	<b>277 AH</b>	<b>55.3 A</b>
@ 1 Hour Rate	<b>140 AH</b>	<b>140 A</b>

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	49kg	108 lbs
Length	31.8 cm	12.5"
Width	18.1 cm	7.13"
Height Inc. Term.	42.5 cm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Rope/Plastic Handle	

### Cycle Life vs. Depth of Discharge

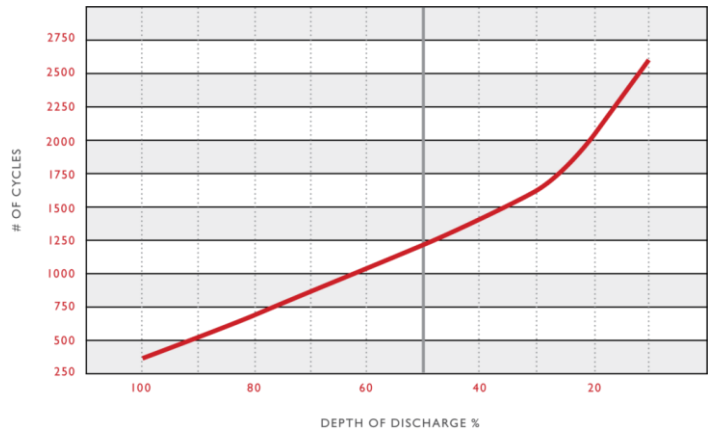

### Voltage vs. Depth of Discharge

