



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

6 FS400



Series	FS	Warranty	1 Year
Volts	6	BCI	L16
Cells	3	Plates/Cell	17
Terminal Type	DT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		
Cables	Optional: 19" 4/0 interconnect cable		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	968
Marine Crank Amps (MCA) 32°F / 0°C	1209
Reserve Capacity (RC @ 25A)	960 Minutes
Reserve Capacity (RC @ 75A)	239 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	532 AH	5.32 A
@ 75 Hour Rate	504 AH	7 A
@ 50 Hour Rate	476 AH	9.52 A
@ 20 Hour Rate	400 AH	20 A
@ 15 Hour Rate	380 AH	25.33 A
@ 10 Hour Rate	352 AH	35.2 A
@ 8 Hour Rate	344 AH	43 A
@ 5 Hour Rate	316 AH	63.2 A
@ 1 Hour Rate	160 AH	160 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	54kg	119 lbs
Length	31.8 cm	12.5"
Width	18.1 cm	7.13"
Height Inc. Term.	42.5 cm	16.75"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Rope/Plastic Handle	

Cycle Life vs. Depth of Discharge

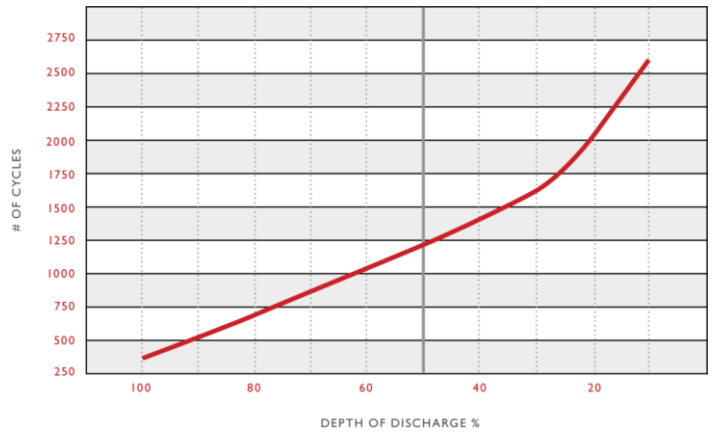

Voltage vs. Depth of Discharge

