




DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

# FLOODED DEEP CYCLE BATTERY

# 6 HHG 15DP



Series	4000	Warranty	7 Years
Volts	6	BCI	2 x 6V PARALLEL 8D
Cells	6 (2x6V Parallel)	Plates/Cell	31
Terminal Type	Flag		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		
Cables	Optional: 19" 4/0 interconnect cable		

### Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

### Capacity

Cold Crank Amps (CCA) 0°F / -17°C	1337
Marine Crank Amps (MCA) 32°F / 0°C	1671
Reserve Capacity (RC @ 25A)	1320 Minutes
Reserve Capacity (RC @ 75A)	440 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>732 AH</b>	<b>7.32 A</b>
@ 75 Hour Rate	<b>693 AH</b>	<b>9.63 A</b>
@ 50 Hour Rate	<b>655 AH</b>	<b>13.09 A</b>
@ 20 Hour Rate	<b>550 AH</b>	<b>27.5 A</b>
@ 15 Hour Rate	<b>523 AH</b>	<b>34.83 A</b>
@ 10 Hour Rate	<b>484 AH</b>	<b>48.4 A</b>
@ 8 Hour Rate	<b>473 AH</b>	<b>59.13 A</b>
@ 5 Hour Rate	<b>435 AH</b>	<b>86.9 A</b>
@ 1 Hour Rate	<b>220 AH</b>	<b>220 A</b>

Ampere hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

### Specifications




SAI GLOBAL

ISO 9001  
Quality

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	78kg	172 lbs
Length	52.7 cm	20.75"
Width	27.9 cm	11"
Height Inc. Term.	25.4 cm	10"
Electrolyte Reserve	57 mm	2.25"
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope / Plastic Handle	

### Cycle Life vs. Depth of Discharge

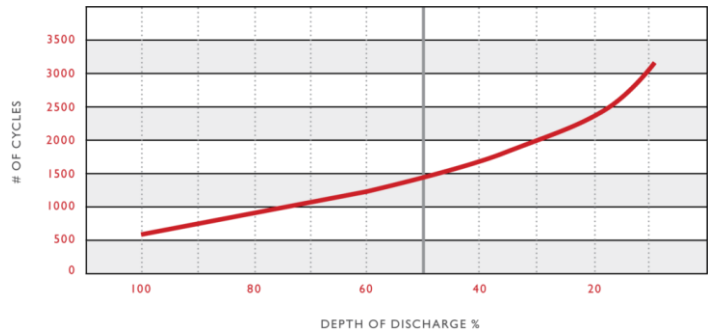

### Voltage vs. Depth of Discharge

