



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

8 FS155



Series	FS	Warranty	1 Year
Volts	8	BCI	GC2
Cells	4	Plates/Cell	11
Terminal Type	UTL		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16" - 18 x 1-1/2"		

Charge

Charge Voltage Range	2.45-2.5V/cell @ 25°C (77°F)
Float Voltage Range	2.25V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	20A
Maximum Charge Current (String)	30 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	469
Marine Crank Amps (MCA) 32°F / 0°C	586
Reserve Capacity (RC @ 25A)	284 Minutes
Reserve Capacity (RC @ 75A)	79 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	198 AH	1.98 A
@ 75 Hour Rate	195 AH	2.71 A
@ 50 Hour Rate	184 AH	3.69 A
@ 20 Hour Rate	155 AH	7.75 A
@ 15 Hour Rate	147 AH	9.82 A
@ 10 Hour Rate	136 AH	13.64 A
@ 8 Hour Rate	133 AH	16.66 A
@ 5 Hour Rate	122 AH	24.49 A
@ 1 Hour Rate	62 AH	62 A

Ampere hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Weight	27kg	59.5 lbs
Length	25.9cm	10.19"
Width	18.1 cm	7.13"
Height Inc. Term.	27.9cm	11"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Electrolyte Reserve	57 mm	2.25"
Container	Polypropylene	
Cover	Polypropylene	
Handles	Top Molded Strap Brackets	

Cycle Life vs. Depth of Discharge

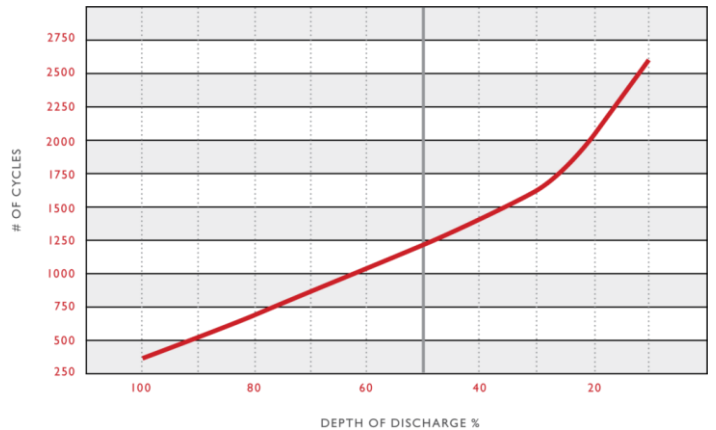

Voltage vs. Depth of Discharge

