




DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

8 HHG 25P



Series	4000	Warranty	7 Years
Volts	8	BCI	SPEC
Cells	4	Plates/Cell	25
Terminal Type	Flag L		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		
Cables	Optional: 19" 4/0 interconnect cable		

Charge

Charge Voltage Range	2.45-2.5 V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3 V/cell @ 25°C (77°F)
Self-Discharge Rate	5%-10% per month at 25°C (77°F)

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	1239
Marine Crank Amps (MCA) 32°F / 0°C	1549
Reserve Capacity (RC @ 25A)	660 Minutes
Reserve Capacity (RC @ 75A)	220 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	366 AH	3.66 A
@ 75 Hour Rate	347 AH	4.81 A
@ 50 Hour Rate	327 AH	6.55 A
@ 20 Hour Rate	275 AH	13.75 A
@ 15 Hour Rate	261 AH	17.42 A
@ 10 Hour Rate	242 AH	24.2 A
@ 8 Hour Rate	237 AH	29.56 A
@ 5 Hour Rate	217 AH	43.45 A
@ 1 Hour Rate	110 AH	110 A

Amper hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications




SAI GLOBAL
ISO 9001
Quality

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	59kg	130lbs
Length	62.2 cm	12.5"
Width	18.7 cm	7.38"
Height Inc. Term.	29.2cm	11.5"
Electrolyte Reserve	70 mm	2.75"
Container (Inner)	Polypropylene	
Cover (Inner)	Polypropylene- heat sealed to inner container	
Container (Outer)	High Density Polyethylene	
Cover (Outer)	High Density Polyethylene snap fit to outer container	
Handles	Rope/Plastic Handle	

Cycle Life vs. Depth of Discharge

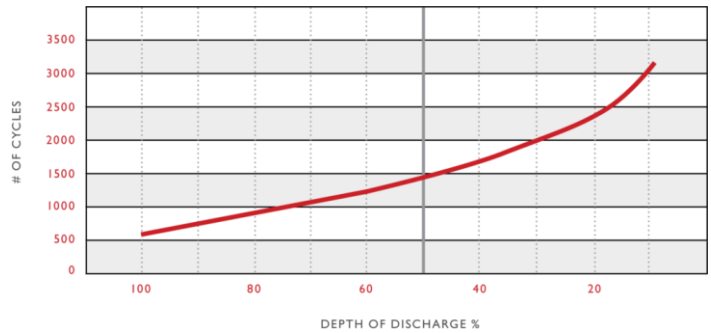

Voltage vs. Depth of Discharge

