



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

FLOODED DEEP CYCLE BATTERY

S-550



Series	4000	Warranty	7 Years
Volts	6	BCI	L16
Cells	3	Plates/Cell	17
Terminal Type	LT		
Included Hardware	S/S Hex Cap Screw, Nut, Lock & Flat Washer		
Size & Thread	5/16"-18 x 1-1/2"		

Charge	
Charge Voltage Range	2.45-2.5V/cell @ 25°C (77°F)
Float Voltage Range	2.25-2.3V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	50A
Maximum Charge Current (String)	85 A
Self-Discharge Rate	5%-10% per month at 25°C (77°F)


Capacity	
Cold Crank Amps (CCA) 0°F / -17°C	1040
Marine Crank Amps (MCA) 32°F / 0°C	1299
Reserve Capacity (RC @ 25A)	828 Minutes
Reserve Capacity (RC @ 75A)	218 Minutes

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	556 AH	5.69 A
@ 75 Hour Rate	539 AH	7.49 A
@ 50 Hour Rate	509 AH	10.19 A
@ 20 Hour Rate	428 AH	21.4 A
@ 15 Hour Rate	402 AH	26.82 A
@ 10 Hour Rate	364 AH	36.38 A
@ 8 Hour Rate	342 AH	42.8 A
@ 5 Hour Rate	300 AH	59.92 A
@ 1 Hour Rate	154 AH	154.08 A

Amphère hour capacity ratings based on specific gravity of 1.280. Reduce capacities 5% for specific gravity of 1.265 and 10% for 1.250.

Specifications		
	Weight	55.5 kg / 122.5 lbs
	Length	31.8 cm / 12.5"
	Width	18.1 cm / 7.13"
	Height Inc. Term.	42.5 cm / 16.75"
ISO 9001 Quality		
<small>Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.</small>		
Electrolyte Reserve	57 mm / 2.25"	
Container	High Density Polypropylene	
Cover	High Density Polypropylene	
Handles	Rope/Plastic Handle	

Cycle Life vs. Depth of Discharge

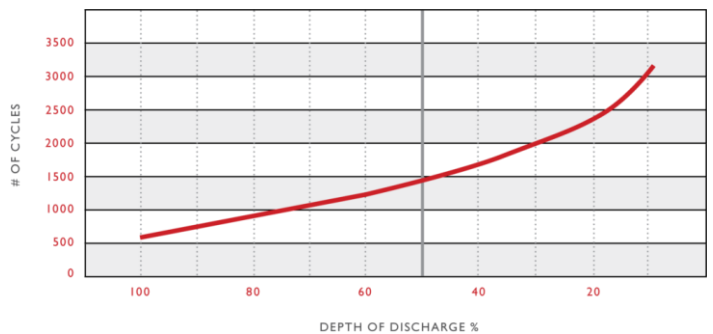

Voltage vs. Depth of Discharge

