

Rolls

DISTRIBUIDO POR

KONNEKTO
ENERGY

+54 11 15 6398 0580 / 15 5315 6982

AGM VRLA DEEP CYCLE BATTERY

S12-128AGM



M8-TP8

Series	AGM-S	Warranty	See Warranty Terms
Volts	12	BCI	Grp 31
Cells	6		
Terminal Type	M8-TP8		
Included Hardware	Stainless Steel Nuts & Bolts		
Size & Thread	M8-TP8		

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current Capacity (String)	23 A
Maximum Charge Current (String)	40 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	3.8 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	760								
Marine Crank Amps (MCA) 32°F / 0°C	910								
Reserve Capacity (RC @ 25A)	175 Minutes								
Reserve Capacity (RC @ 75A)	45 Minutes								
Capacity Affect by Temperature	<table border="1"> <tr> <td>40°C (104°F)</td> <td>25°C (77°F)</td> <td>0°C (32°F)</td> <td>-15°C (5°F)</td> </tr> <tr> <td>102%</td> <td>100%</td> <td>85%</td> <td>65%</td> </tr> </table>	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)	102%	100%	85%	65%
40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)						
102%	100%	85%	65%						

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	128 AH	1.28 A
@ 20 Hour Rate	115 AH	5.75 A
@ 10 Hour Rate	99 AH	10.4 A
@ 5 Hour Rate	91 AH	18.2 A

Cut Off Voltage	Constant Current Discharge					
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr
VPC	62.1	33	27	18.2	11.9	10.4

Specifications

Certified System



SAI GLOBAL


ISO 9001
Quality

Weight	32.5	73lbs
Length	32.8 cm	1.91"
Width	17.2 cm	6.89"
Height Inc. Term.	23.6 cm	9.33"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	Nylon Strap

Cycle Life vs. Depth of Discharge

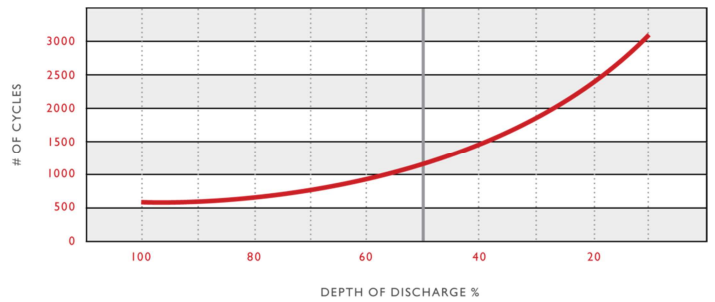

Capacity vs. Temperature

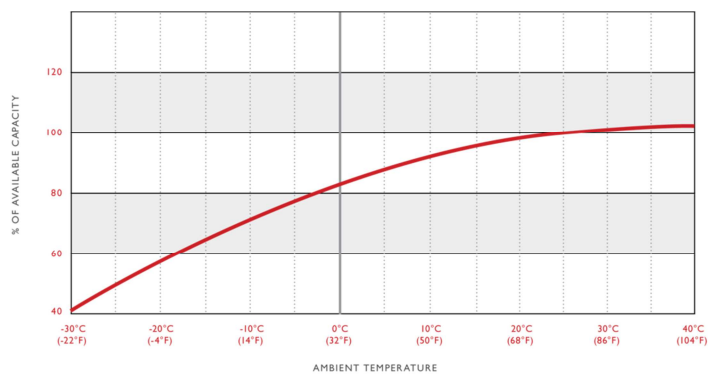

Detailed Illustration

