



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

AGM VRLA DEEP CYCLE BATTERY

S12-95AGM



M8-TP08

Series	AGM-S	Warranty	See Warranty Terms
Volts	12	BCI	Grp 24
Cells	6		
Terminal Type		M6-TP08	
Included Hardware		Stainless Steel Nuts & Bolts	
Size & Thread		M6-TP08	

Charge

Charge Voltage Range	14.7V @ 25°C (77°F)
Float Voltage Range	13.8V @ 25°C (77°F)
Recommended Charge Current Capacity (String)	15 A
Maximum Charge Current (String)	25 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	5.5 mΩ

Capacity

Cold Crank Amps (CCA) 0°F / -17°C	510
Marine Crank Amps (MCA) 32°F / 0°C	600
Reserve Capacity (RC @ 25A)	145 Minutes
Reserve Capacity (RC @ 75A)	34 Minutes
Capacity Affect by Temperature	40°C (104°F) 25°C (77°F) 0°C (32°F) -15°C (5°F)
	102% 100% 85% 65%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	95 AH	0.95 A
@ 20 Hour Rate	85 AH	4.25 A
@ 10 Hour Rate	77 AH	7.7 A
@ 5 Hour Rate	70 AH	14 A

Cut Off Voltage	Constant Current Discharge						
	1 hr	2 hr	3 hr	5 hr	8 hr	10 hr	
VPC	43.8	25.6	19.2	13.9	9.2	7.7	

Specifications




SAI GLOBAL

ISO 9001
Quality


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Weight	25kg	55lbs
Length	26cm	10.24"
Width	16.9cm	6.77"
Height Inc. Term.	23.7cm	9.33"
Container	ABS	
Cover	ABS	
Handles	Rope/Plastic Handle	

Cycle Life vs. Depth of Discharge

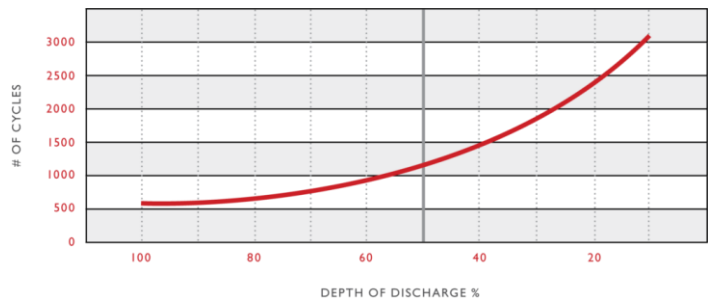

Capacity vs. Temperature

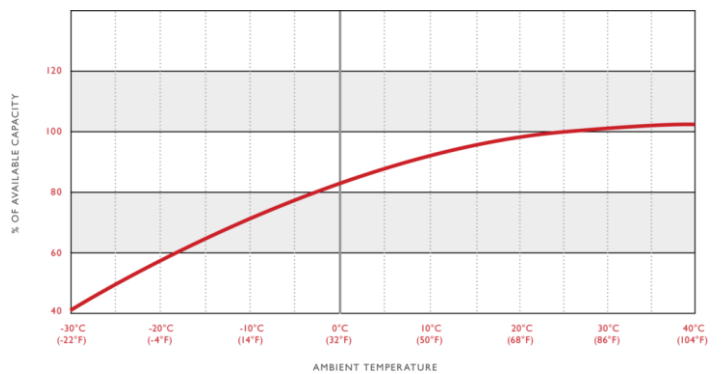

Detailed Illustration

