

# Rolls

DISTRIBUIDO POR

**KONNEKTO**  
ENERGY

+54 11 15 6398 0580 / 15 5315 6982

## AGM VRLA DEEP CYCLE BATTERY

## S2-2375AGM



Series	AGM-S	Warranty	See Warranty Terms
Volts	2	BCI	SPEC
Cells	1		
Terminal Type		F8	
Included Hardware		Stainless Steel Nuts & Bolts	
Size & Thread		M8	

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	440 A
Maximum Charge Current (String)	660 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)

### Capacity

Reserve Capacity (RC @ 25A)	5700 Minutes
Capacity Affected by Temperature	40°C (104°F) 25°C (77°F) 0°C (32°F) -15°C (5°F)
	102% 100% 85% 65%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>2375 AH</b>	<b>23.75 A</b>
@ 20 Hour Rate	<b>2200 AH</b>	<b>110 A</b>
@ 10 Hour Rate	<b>2000 AH</b>	<b>200 A</b>
@ 5 Hour Rate	<b>1835 AH</b>	<b>367 A</b>

Cut-off Voltage	Constant Current Discharge
VPC	1 hr 2 hr 3 hr 5 hr 8 hr 10 hr
	1266 755 548 367 250 202

### Specifications




**SAI GLOBAL**  
ISO 9001  
Quality

Weight	146 kg	322 lbs
Length	49 cm	19.29"
Width	34.9 cm	13.74"
Height Inc. Term.	38.2 cm	15.04"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	None

### Cycle Life vs. Depth of Discharge

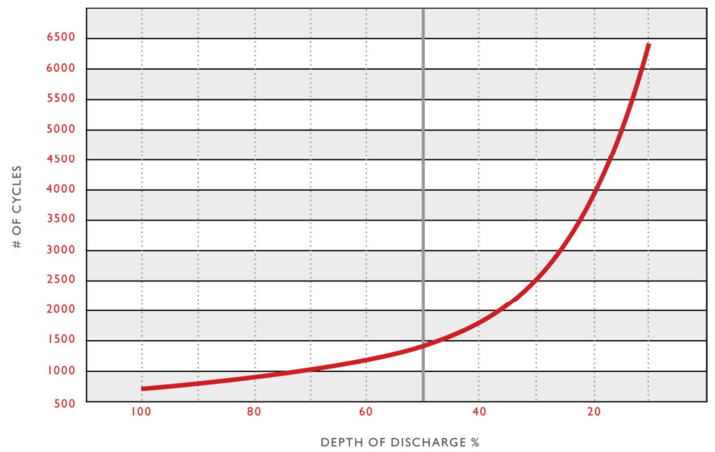

### Capacity vs. Temperature

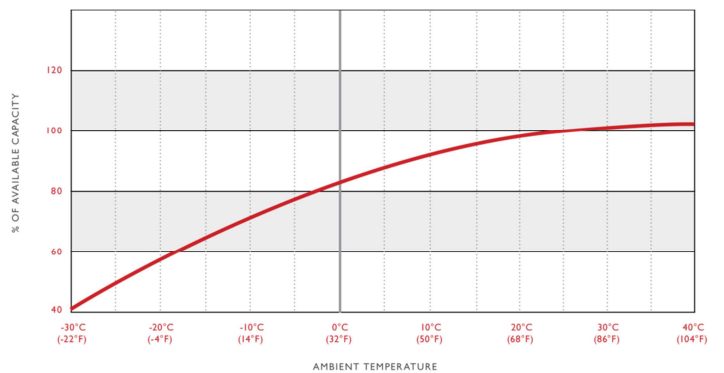

### Detailed Illustration

