



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

**OPzV GEL DEEP CYCLE BATTERY**

**S2-336GEL**



Series	GEL	Warranty	See Warranty Terms
Volts	2	BCI	2V OPzV
Cells	1		
Terminal Type		F10	
Included Hardware		Threaded Insert & Bolt	
Size & Thread		F10-M10	

**Charge**

Charge Voltage Range	2.38 V/cell @ 25°C (77°F)
Float Voltage Range	2.28 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	30 A
Maximum Charge Current (String)	90 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)
Internal Resistance	0.7 mΩ

**Capacity**

Capacity Affect by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	105%	100%	89%	79%

Hour Rate	Capacity / AMP Hour	Current / AMPs
@ 100 Hour Rate	<b>452 AH</b>	<b>4.52 A</b>
@ 20 Hour Rate	<b>378 AH</b>	<b>18.9 A</b>
@ 10 Hour Rate	<b>336 AH</b>	<b>33.6 A</b>

**Specifications**



SAI GLOBAL


ISO 9001 Quality

Weight	28kg	61.5lbs
Length	14.5 cm	5.71"
Width	20.6 cm	8.11"
Height Inc. Term.	38.2 cm	15.04"

Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	None

**Cycle Life vs. Depth of Discharge**

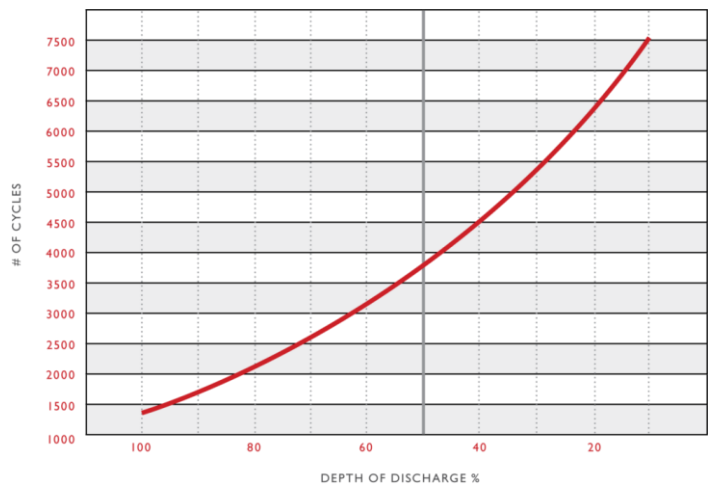

**Capacity vs. Temperature**

