



DISTRIBUIDO POR



+54 11 15 6398 0580 / 15 5315 6982

# AGM VRLA DEEP CYCLE BATTERY

# S2-3560AGM



**LT - Lug Terminal**

Series	AGM-S	Warranty	See Warranty Terms
Volts	2	BCI	SPEC
Cells	1		
Terminal Type	LT		
Included Hardware	Stainless Steel Nuts & Bolts		
Size & Thread	F10-M8		

### Charge

Charge Voltage Range	2.45 V/cell @ 25°C (77°F)
Float Voltage Range	2.3 V/cell @ 25°C (77°F)
Recommended Charge Current Capacity (String)	660 A
Maximum Charge Current (String)	990 A
Self-Discharge Rate	Less than 2% per month at 25°C (77°F)

### Capacity

Reserve Capacity (RC @ 25A)	8640 Minutes			
Capacity Affected by Temperature	40°C (104°F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%

Hour Rate	Capacity / AMP Hour	Current / AMPS
@ 100 Hour Rate	<b>3560 AH</b>	<b>35.6 A</b>
@ 20 Hour Rate	<b>3300 AH</b>	<b>165 A</b>
@ 10 Hour Rate	<b>3030 AH</b>	<b>303 A</b>
@ 5 Hour Rate	<b>2750 AH</b>	<b>550 A</b>

Cut Off Voltage	Constant Current Discharge
VPC	1 hr 2 hr 3 hr 5 hr 8 hr 10 hr
	1899 1132 822 550 375 303

### Specifications




SAI GLOBAL  
ISO 9001  
Quality

Weight	220 kg	485 lbs
Length	71.1 cm	27.99"
Width	35.3 cm	13.9"
Height Inc. Term.	38.2 cm	15.04"


Product measurements & weights are calculated based on sample data. Individual specifications are subject to vary due to the manufacturing process, battery components & electrolyte levels.

Container	ABS
Cover	ABS
Handles	None

### Cycle Life vs. Depth of Discharge

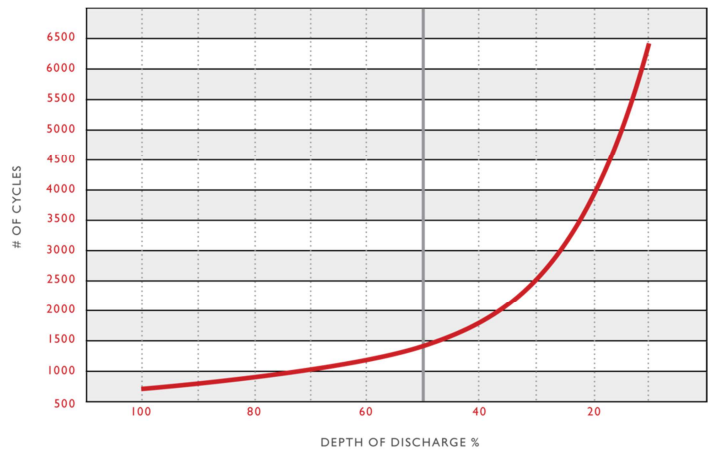

### Capacity vs. Temperature

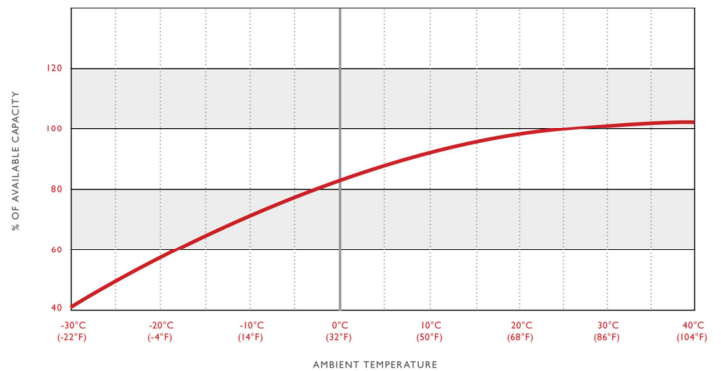

### Detailed Illustration

